
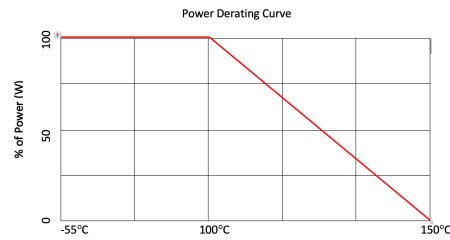


SPECIFICATIONS

- Frequency: DC – 4GHz
- Input Power: 150W
- VSWR: 1.20 max
- Resistance: $50\Omega \pm 5\%$
- Substrate Material: AIN
- Flange Material: Nickle Plated Copper
- Tabs material /Finish: Ag
- Tab attachment: Brazed with epoxy encapsulation
- Cover substrate: Alumina
- Resistive Film: Thick Film
- Temperature: -55°C to 150°C

- Standards: MIL-DTL-39030
- Lead-Free, RoHS certified

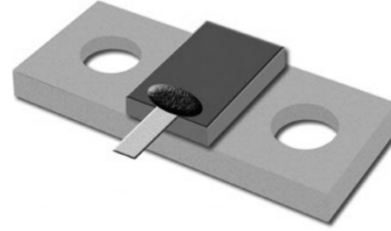

MECHANICAL OUTLINE

