EPTC-10-50-NM

Coaxial Termination


SPECIFICATIONS

- Frequency: DC 5 GHz
- Power: 10 W
- VSWR: 1.20 max
- Impedance: $50\Omega \pm 5\%$
- Connector: Type-N, male
- Temperature: -55°C to 125°C
- Standards: MIL-DTL-39030
- Lead-Free, RoHS certified


REV 1.0.0

ELECTRO - PHOTONICS

Power Derating Curve



MECHANICAL OUTLINE

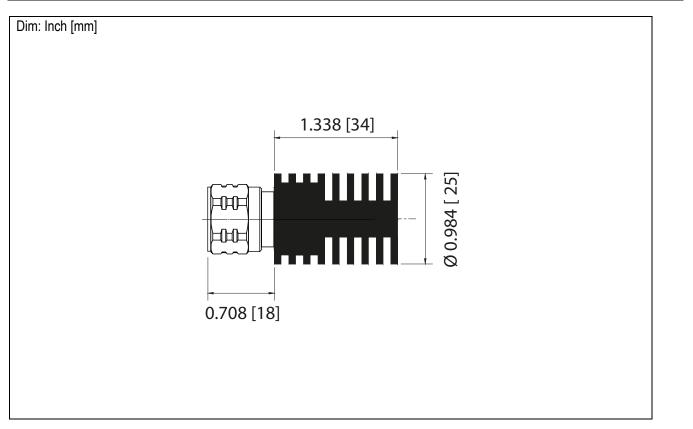

TERMINATIONS

