


# EPFLA-350-B100-XXX

AlN Flangeless Attenuator

REV 1.0.0




## SPECIFICATIONS

- Substrate Material: AlN
- Resistive Film: Thick Film
- Tabs material /Finish: Brass/Ag
- Tab attachment: Brazed with epoxy encapsulation
- Frequency: DC - 3GHz
- Input Power: 100W
- Standards: MIL-DTL-3933
- Lead-Free, RoHS compliant

## MECHANICAL OUTLINE

## POWER DERATING

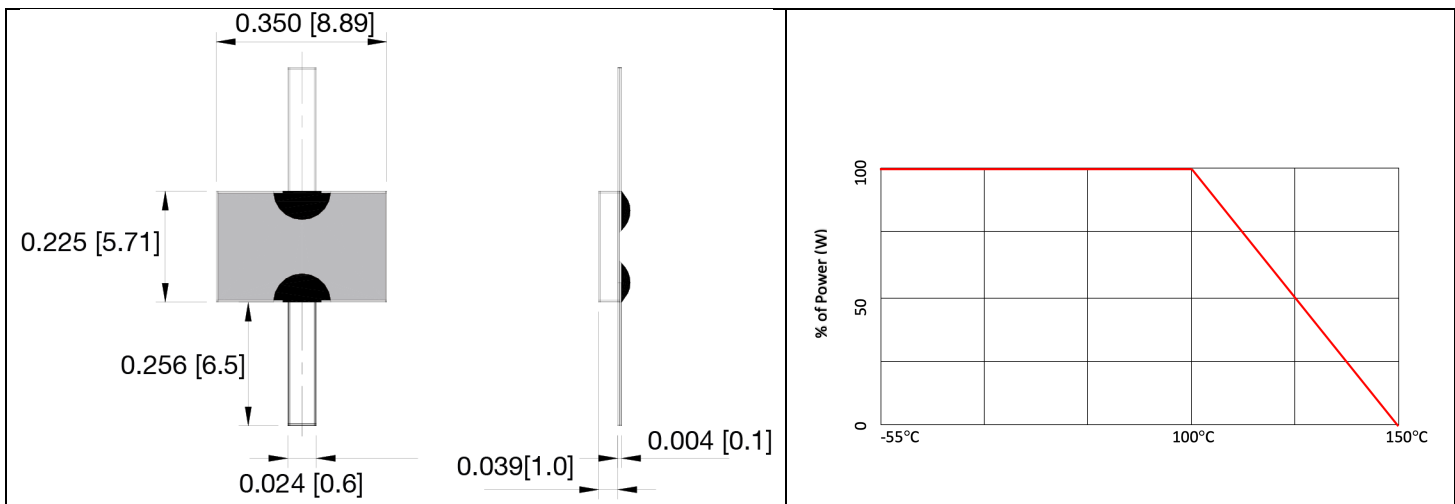

Dimension: inch [mm]

## ORDERING INFO

Attenuation* (dB)	Attenuation Accuracy ( $\pm$ dB)	VSWR
20	0.5	1.20
30	1.5	1.20

\*Other values available upon request

**Example:** EPFLA-350-B100-30 (30dB)