


EPFLA-350-B50-XXX

BeO Flangeless Attenuator

REV 1.0.0




SPECIFICATIONS

- Substrate Material: BeO
- Resistive Film: Thick Film
- Tabs material /Finish: Ag
- Tab attachment: Brazed with epoxy encapsulation
- Frequency: DC - 3GHz
- Input Power: 50W
- Standards: MIL-DTL-3933
- Lead-Free, RoHS compliant

MECHANICAL OUTLINE

POWER DERATING

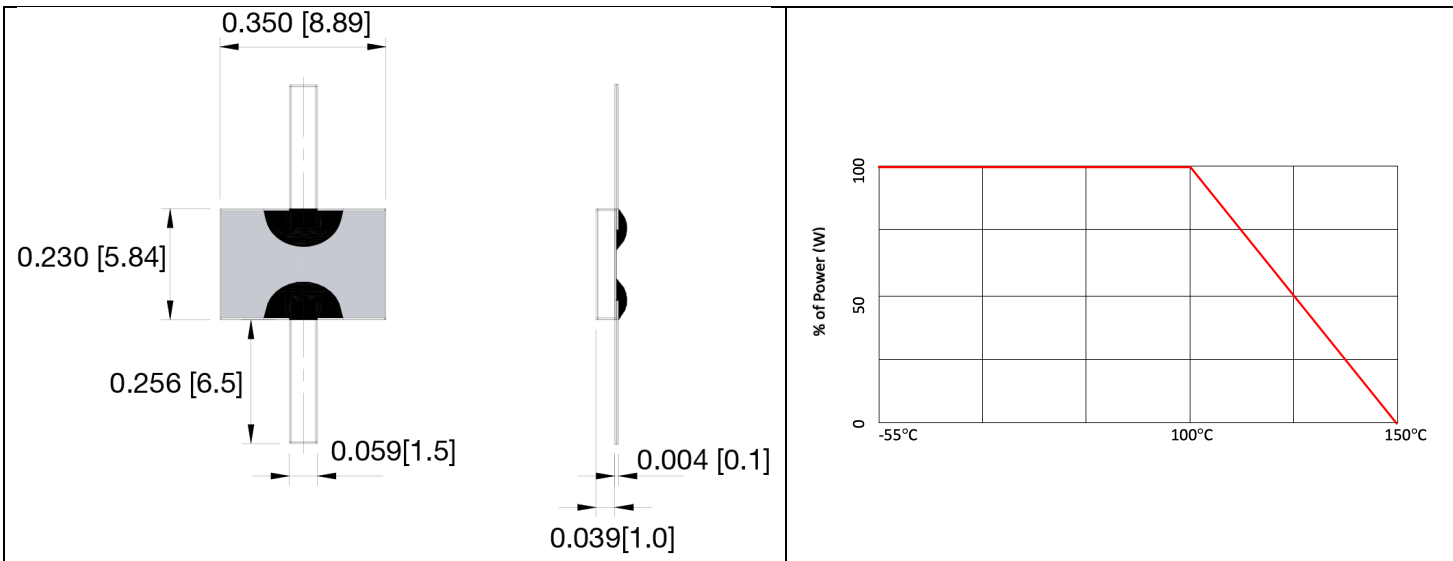

ORDERING INFO

Attenuation* (dB)	Attenuation Accuracy (± dB)	VSWR
3	0.6	1.25
6	0.6	1.25
10	0.6	1.25
20	1.0	1.25
30	1.2	1.25

*Other values available upon request

Example: EPFLA-350-B50-3 (3dB)