



EPCI-5000-10000-SF

ELECTRO - PHOTONICS

COAXIAL CIRCULATOR

REV 1.0.0


SPECIFICATIONS

FREQ (MHz)	PART NUMBER	INSERTION LOSS (dB) max	ISOLATION (dB) MIN	VSWR	POWER (W)	OPERATING TEMP (°C)	IMEDANCE (Ω)
5000-10000	EPCI-5000-10000-SF	0.6	18	1.3	20	-30 to +70	50

All specifications are Ta = +25C and subject to change without notice.

MECHANICAL OUTLINE

* Dimensions are mm

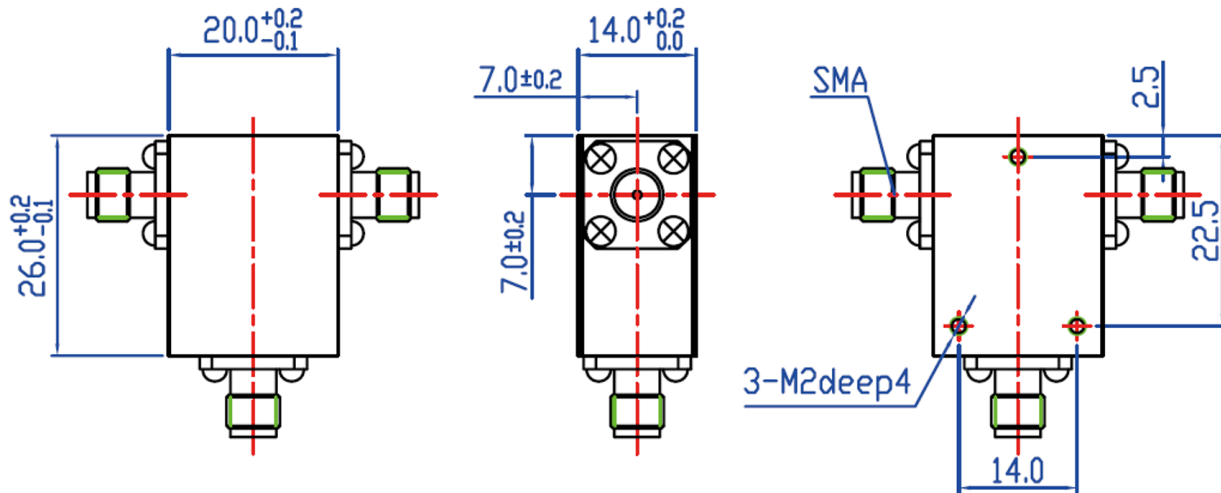

CIRULATORS