EPCRT-150-2-50-5



AIN Coaxial Remote Termination REV 1.0.0

SPECIFICATIONS


Frequency: DC – 2 GHz
Input Power: 150W
VSWR: 1.06 max
Impedance: 50Ω ± 5%
Substrate Material: AIN


Housing material /Plaiting: Aluminum/Ag

RF Cable: 0.086Connector: SMA


■ Temperature: -55°C to 200°C

Standards: MIL-DTL-39030Lead-Free, RoHS certified





MECHANICAL OUTLINE

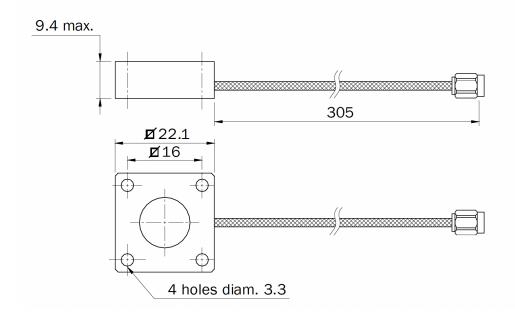

Dim: mm