



EPDD12000-30-SMA

30dB Dual DIRECTIONAL COUPLER - SMA FEMALE

REV 1.0.0


SPECIFICATIONS

FREQ (MHz)	POWER (W)	PART NUMBER	INSERTION LOSS (dB)	COUPLING (dB)	DIRECTIVITY (dB)	VSWR	OPERATING TEMP (°C)
6000-18000	50	EPD12000-30-SMA	1.5 max	30 ± 1	10 min	1.10 max	-55 to +85

Case material: Aluminum alloy with black paint
 Connectors: SMA female 4 places, termination 2 places
 Impedance: 50 Ohm

MECHANICAL OUTLINE

* Dimensions are in [mm]

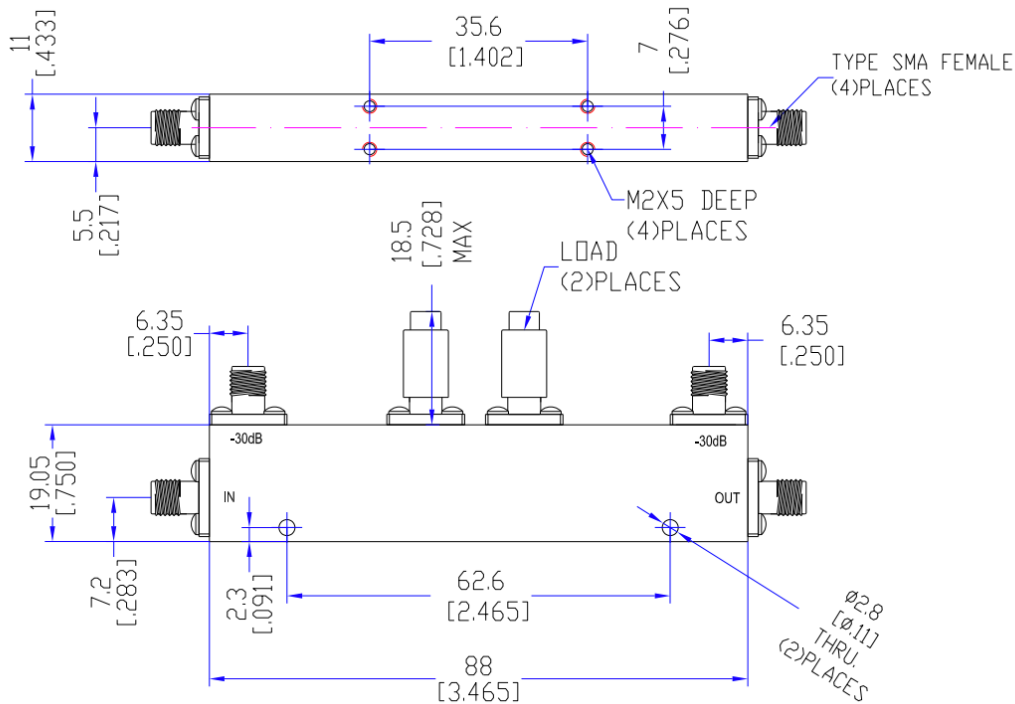

DIRECTIONAL COUPLERS