

EPAC-150-XX-NM

Coaxial Attenuator

REV 1.0.0

SPECIFICATIONS


- Frequency: DC – 4 GHz
- Power: 150 W
- VSWR: ≤ 1.2 at 2GHz, ≤ 1.30 at 4GHz
- Impedance: $50\Omega \pm 5\%$
- Connector: Type-N, male/female or 7-16 male/female
- Temperature: -55°C to 125°C

- Standards: MIL-DTL-3933
- Lead-Free, RoHS certified



MECHANICAL OUTLINE

POWER DERATING

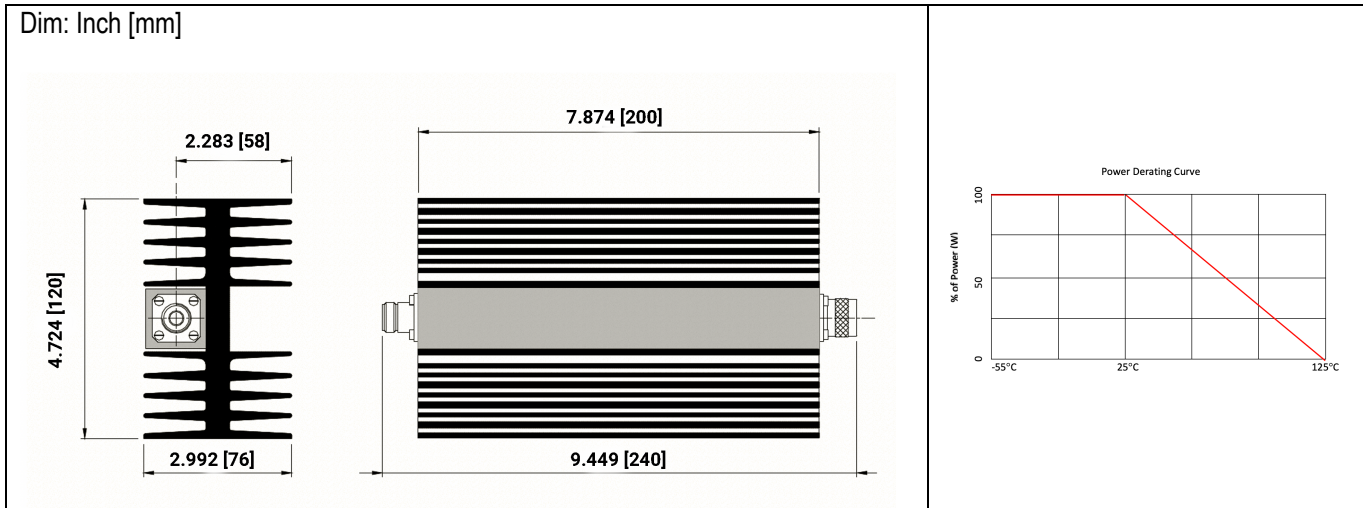

ORDERING INFO

Attenuation* (dB)	Attenuation Accuracy (\pm dB)
3	0.5
6	0.5
10	1
20	1
30	1
40	1
50	1

*Other values available upon request.

Example: EPAC-150-30-NM (30dB)