

Waveguide to Coaxial Adapter REV 1.0.0


SPECIFICATIONS

FREQ (GHz)	PART NUMBER	INSERTION LOSS (dB)	VSWR	POWER (W)	Temp (°C)	CONNECTOR	FLANGE
26.5 – 40	EPWG-C-26R5-40- 01	≤ 0.25	≤1.25	20	-30 to +70°C	2.9mm - Female	WR28

All specifications are subject to change without notice.

MECHANICAL OUTLINE

* Dimensions are mm (Tolerance: (±0.1 mm)

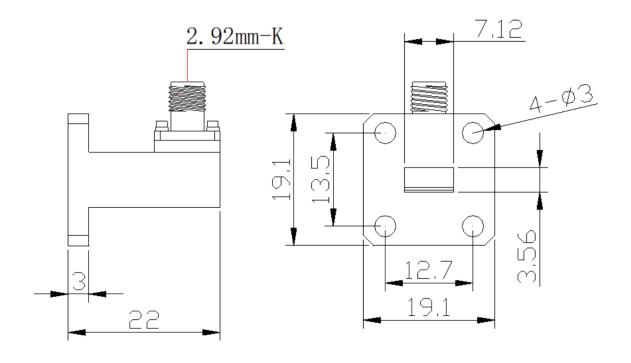

Notes:

1. Material: Gold plated brass.