

FRFS-BCR122-001

For Coilcraft BCR-122 Ruggedized Conical Inductor

REV 1.00





The FRFS-BCR122-001 is a high performance RF/Microwave production type fixture for testing Coilcraft BCR-122 ruggedized conical inductor. This fixture is constructed to provide repeatable measurements in a production environment. The FRFS-BCR122-001 test fixture features a fast load/unload clamshell type cover.

ELECTRICAL/ MECHANICAL SPECIFICATIONS

PARAMETER	SPECIFICATION*
FREQUENCY RANGE	DC – 10 GHz
RF PORTS	2
RL	23 dB min
DC PINS	0
MATING INTERFACE	SMA JACK (FEMALE)

DUT FOOTPRINT

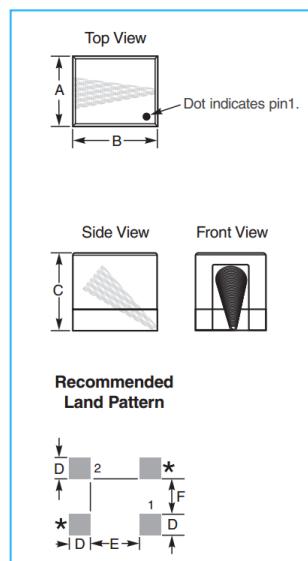



Electro-Photonics LLC reserves the right to modify drawings, configurations, specifications, and design at any time without prior notification.

FRFS-BCR122-001

For Coilcraft BCR-122 Ruggedized Conical Inductor

REV 1.00

GALLERY

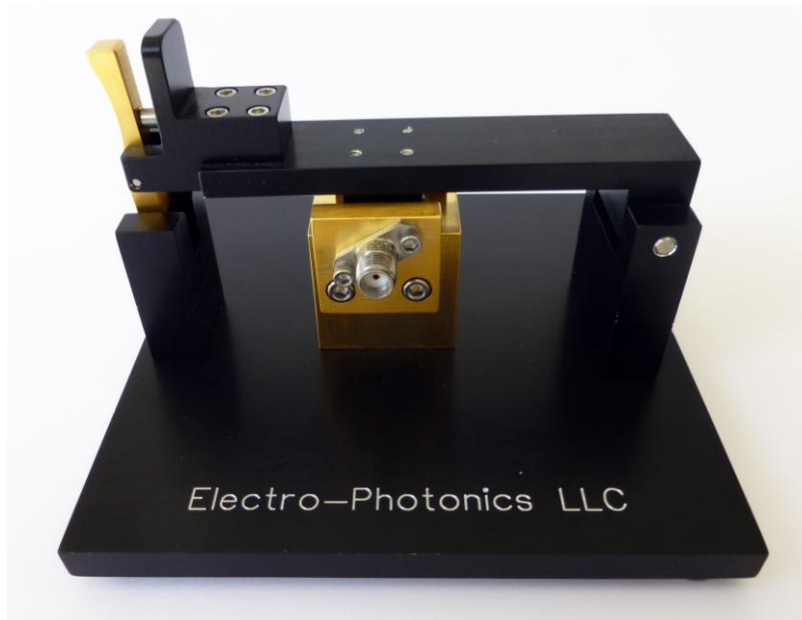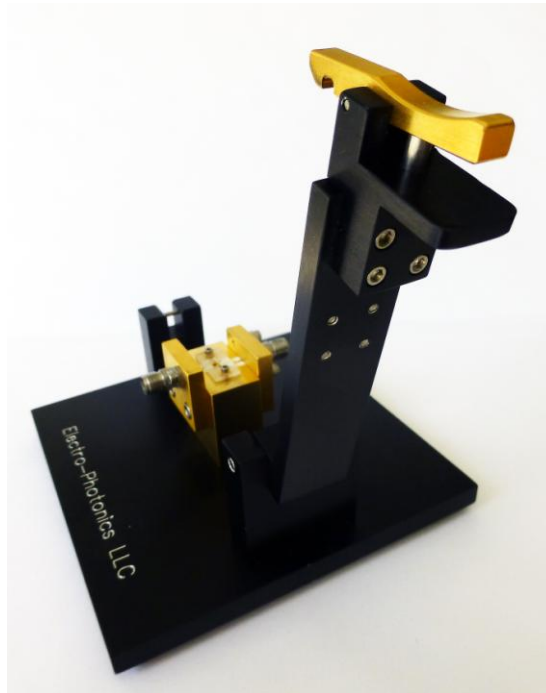

Electro-Photonics LLC reserves the right to modify drawings, configurations, specifications, and design at any time without prior notification.

FRFS-BCR122-001



For Coilcraft BCR-122 Ruggedized Conical Inductor

REV 1.00

CUSTOMIZATION

The FRFS-BCR122 can be customized for number of similar DUT's in this or similar package. In addition, Electro-Photonics can design a custom solution per your requirements.

Please consult sales sales@electro-photonics.com to discuss customization options.

ORDERING INFO

FRFS

PRODUCT CODE

-

BCR122

FIXTURE CODE

FIXTURES

Electro-Photonics LLC reserves the right to modify drawings, configurations, specifications, and design at any time without prior notification.